





wheel stand pro

## Maintenance


- Let loose joint before making any adjustment
- Keep this product in dry environment, free of chemical substances and vapour
- Never screw home stronger than necessary. You can damage thread or/and bolt
- Clean it with a dry cloth

Drive two conical screws M6x12 and two cups M6 with two washers to connect the gear shifter plate with the main plate.

To mount the gear shifter in a lower position attach the gear shifter plate upside down. (choose which setting better suits your preferences)

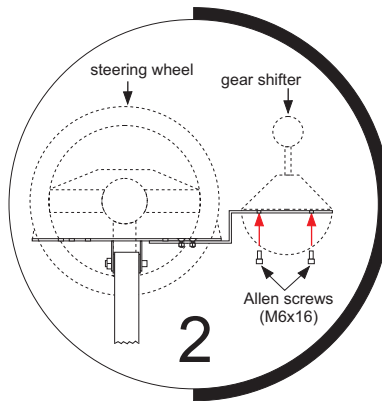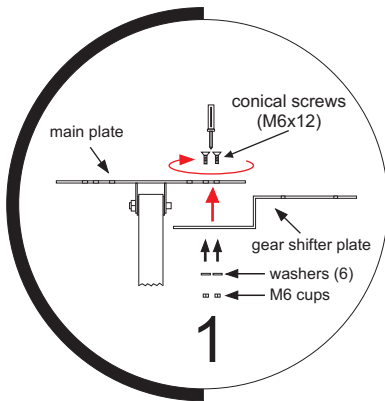

Put your wheel on the main plate and drive two Allen screws (M6x16) to fix it firmly. Drive another two screws (M6x16) to fix the gear shifter to the gear shifter plate.

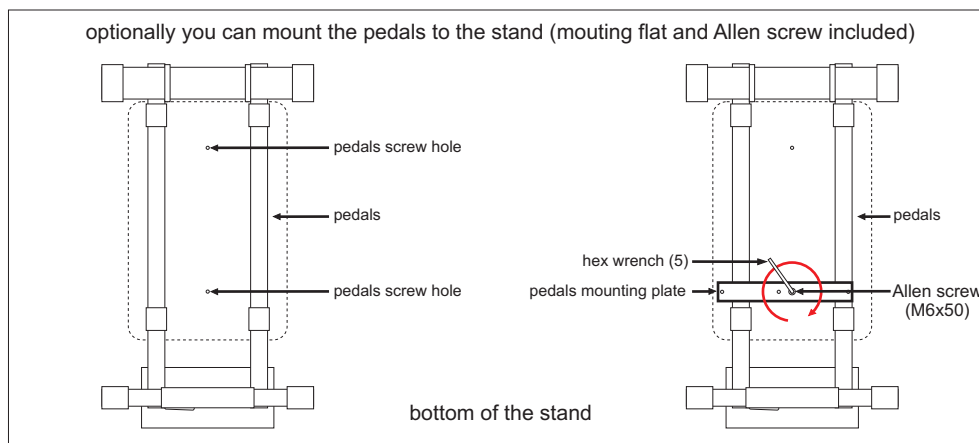

- In the box:**
- 1 wheel stand pro unit
  - 1 G27 gear shifter plate, 1 pedals mounting plate
  - 1 hex wrench 5, 1 hex wrench 6, 1 open-end wrench 13
  - 4 Allen screws (M6x16), 2 conical screws (M6x12), 1 Allen screw (M6x50), 2 cups (M6), 2 washers (6), 2 bands
  - 1 instruction

## Warranty

Wheel Stand Pro offers two year warranty from the date of purchase.

This warranty is available to the original owner by returning this paper.

- Warranty coverage includes all parts and workmanship
- Warranty is void if damage is due to abuse, neglect or modification
- Cost associated with the return of this product is the sole responsibility of the owner

In case of any problems with your product please contact us at [order@wheelstandpro.com](mailto:order@wheelstandpro.com)

**Tightening the screws too much can cause damage to the wheel and pedals.**

For details please visit our website

[www.wheelstandpro.us](http://www.wheelstandpro.us)

e-drivers` choice